


Assembly




Specifications:

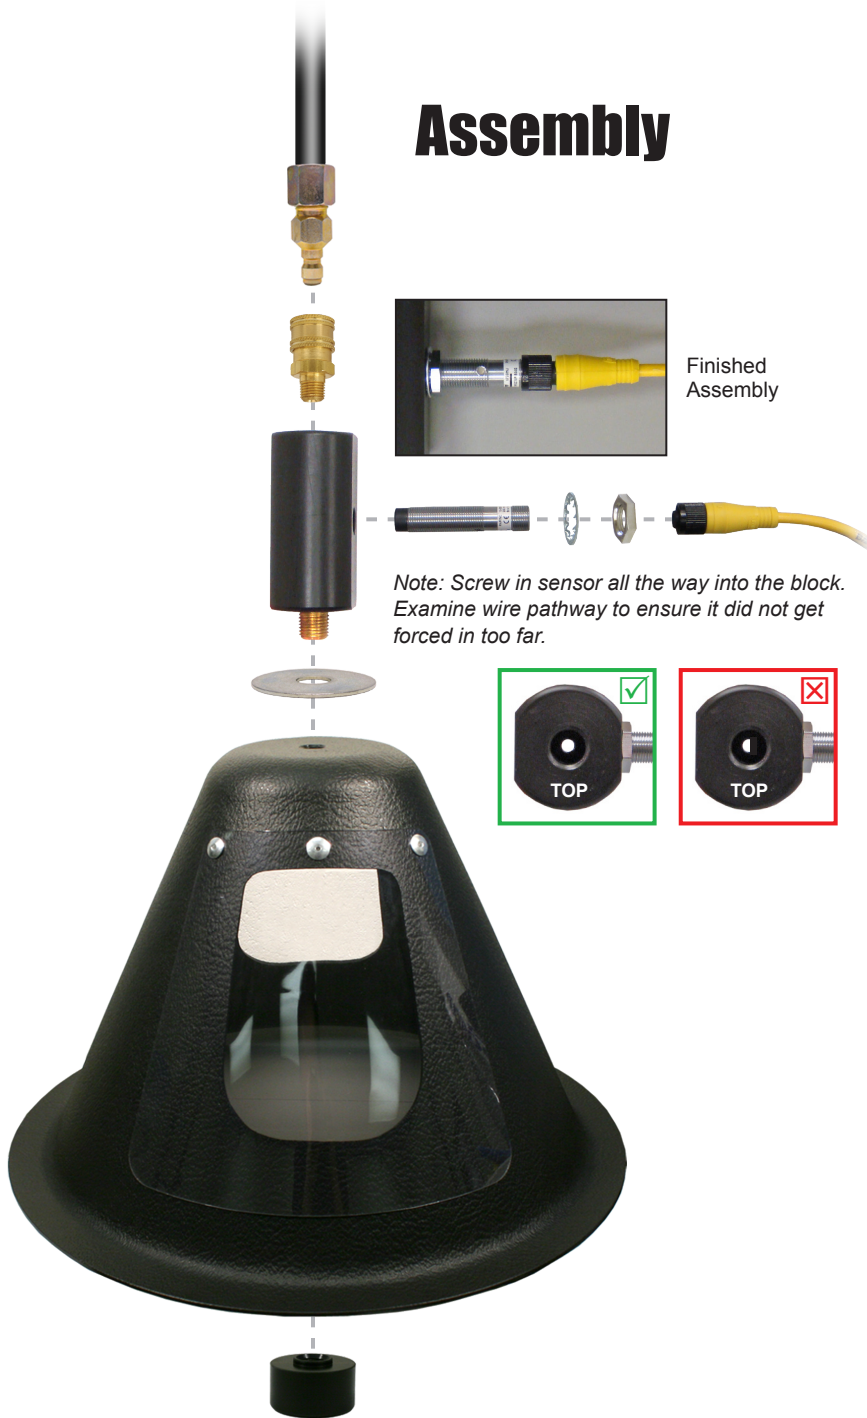

LIGHT OFF:
Wire Present

LIGHT ON:
No Wire

10 mm

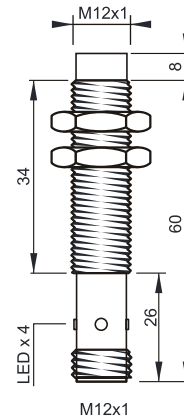

Functional Principle - Inductive

10 mm - Unshielded

10...30 VDC, 3-wire

< 8 mA

200 mA, self-resetting

< 1.5 V @ 200 mA

500 Hz

< 1 % (Sn)

3...15 %


-25...75 °C

IP67


POM

Tin-Nickel Plated Brass

Connector M12



Output Schematics

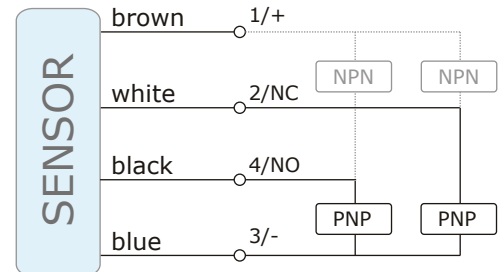

Last Revised: 5/6/16