

DRUM HOODS


- ▶ Hood covers designed for 20", 20.4", 23.4", and 26" drums (508, 518, 594 and 660 mm)
- ▶ Constructed of tough polyethylene for long shop life
- ▶ Dual windows provide easy access and viewing
- ▶ Flange with tabs securely anchors hood to package
- ▶ Orbital Arm or Direct Pull Kit guarantee smooth wire feeding
- ▶ **Lifetime guarantee against breakage**

Flanged hoods fit both chimed drums and environmental packs



DIRECT PULL KIT

- ▶ Quick disconnect with polished ceramic inlet prevents wire shaving
- ▶ Fits all cone and wire sizes
- ▶ **Lifetime guarantee not to wear out**

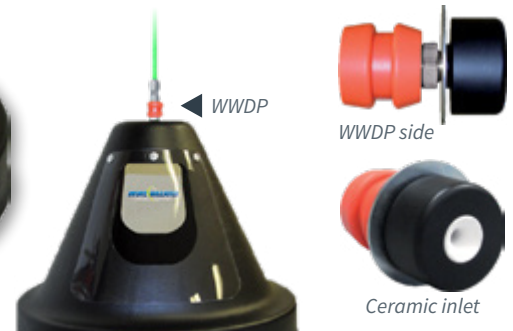

Round Drum Hood



Octagon Drum Hood




Square Drum Hood

WIRE PRESENCE SENSOR BLOCK & PROXIMITY SWITCH

WWSB-M12-K


- ▶ Detects and signals when wire drum is empty
- ▶ Proximity switch may be connected to PLC to stop welding cycle when wire is depleted
- ▶ Uses 12 mm proximity switch (WWA5-E34), other switches available upon request
- ▶ Compatible with all Wire Wizard® Drum Hoods

Quick disconnect and fittings sold separately



ORBITAL ARM KITS

- ▶ Helps prevent wire from tangling inside the drum
- ▶ Arms available for all wire sizes and types up to 1/16" (1.6 mm)
- ▶ Polished ceramic inlet guide will not shave wire
- ▶ Compatible with all Wire Wizard® drum hoods

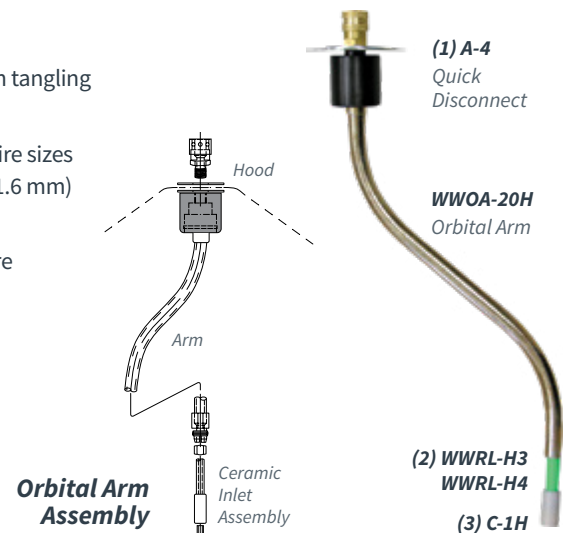

ROUND DRUM HOODS

20" - 23" (508 - 584 mm) hoods fit both chimed drums and environmental packs



Part No.	Description
WW10204F	20.4" (518 mm) Round Hood Only
WW10204F-DP	20.4" (518 mm) Round Hood with Direct Pull Kit
WW10231F	23" (584 mm) Round Hood Only
WW10231F-DP	23" (584 mm) Round Hood with Direct Pull Kit
WW10260F	26" (660 mm) Round Hood Only
WW10260F-DP	26" (660 mm) Round Hood with Direct Pull Kit

OCTAGON DRUM HOODS



Part No.	Description
WWOC-20.5	20.5" (521 mm) Octagon Hood (500 lb / 227 kg)
WWOC20.5-DP	20.5" (521 mm) Octagon Hood w/ Direct Pull Kit (500 lb / 227 kg)
WWOC-21.5	21.5" (546 mm) Octagon Hood (500 lb / 227 kg)
WWOC-21.5-DP	21.5" (546 mm) Octagon Hood w/ Direct Pull Kit (500 lb / 227 kg)
WWOC-23.5	23.5" (597 mm) Octagon Hood (900 lb / 408 kg)
WWOC-23.5-DP	23.5" (597 mm) Octagon Hood w/ Direct Pull Kit (900 lb / 408 kg)
WWOC-24.5	24.5" (622 mm) Octagon Hood (1,000 lb / 453 kg)
WWOC24.5-DP	24.5" (622 mm) Octagon Hood w/ Direct Pull Kit (1,000 lb / 453 kg)

SQUARE DRUM HOODS



Part No.	Description
WWSC-21	21" (533 mm) Square Hood (500 lb / 227 kg)
WWSC21-DP	21" (533 mm) Square Hood with Direct Pull Kit
WWSC-24	24" (610 mm) Square Hood (1000 lb / 453 kg)
WWSC24-DP	24" (610 mm) Square Hood with Direct Pull Kit
WWSC-29	29" (737 mm) Square Hood (990 lb / 449 kg)

DRUM DOLLIES 1,000 lb/453 kg capacity

For drums/boxes up to 25" (635 mm) - use FDD-MD-LD for 29" packages



Universal Drum Dolly

FDD-MD Swivel casters on 2 wheels

FDD-MD-SW Swivel casters on all wheels
For drums/boxes 25" (635 mm) and under



Large Universal Drum Dolly

FDD-MD-LD

For drums/boxes between
25 - 30" (635 - 762 mm)

ORBITAL ARM KITS

with Quick Disconnect



Part No.	Description
WWOA-20	20" (508 mm) - 23.4" (594 mm) cover for up to 0.062 (1.6 mm) Wire Steel or Cored Wire
WWOA-20H	20" (508 mm) - 23.4" (594 mm) cover for 0.062-3/32 (1.6-2.4 mm) Aluminum/Non-ferrous or Steel Wire

ORBITAL ARM REPLACEMENT PARTS

Part No.	Description
A-4	(1) Quick Disconnect (QD)
WWRL-H3	(2) Replacement Liner for WWOA-20
WWRL-H4	(2) Replacement Liner with Inlet Guide for WWOA-20H
C-1H	(3) Inlet Guide with Ceramic Insert

ADDITIONAL EQUIPMENT

Part No.	Description
WWDP	Direct Pull Kit
WWSB-M12-K	Sensor Block and Proximity Switch Kit
WWSB-M12	Sensor Block (12 mm)
WWA5-E34	Proximity Switch (PNP)
WWA5-E35	Proximity Switch (NPN)
WWDI	Conduit Connection Insulator



FDSC-13
Heavy Duty Drum Staging Cart



WWSD
Skid Dolly
(27.5" (698.5 mm) square)